
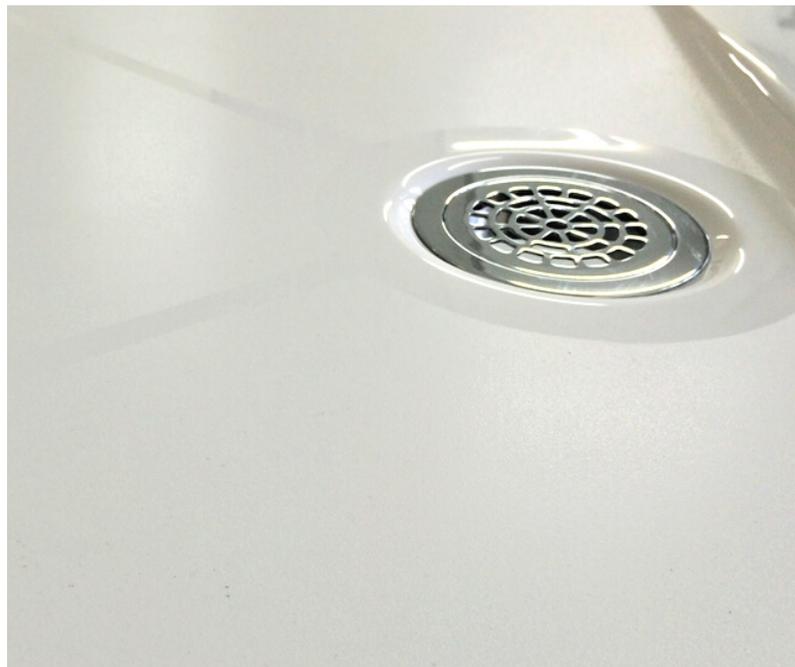


Technical Advise

Care and Maintenance of Swiss GriP Non-Slip

SWISSGriP+[®]
NON-SLIP COATINGS

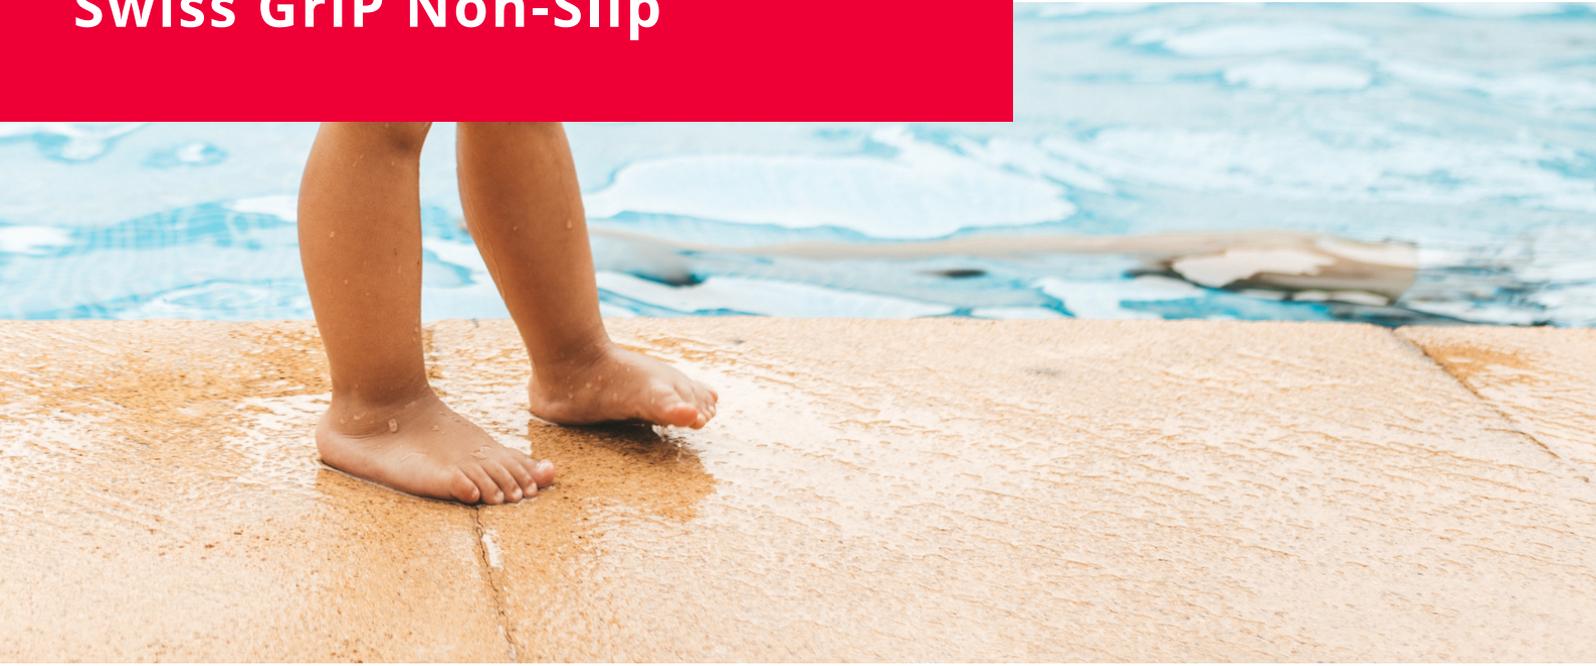

Swiss GriP® coatings are the best choice to create long-lasting non-slip surfaces.

SWISS GriP+
NON-SLIP SOLUTIONS

To ensure the life of your Swiss GriP Coating is maximised and to comply with Swiss GriP warranty requirements, a simple and regular maintenance program should be implemented.

Recommended Care and Maintenance Schedule

It is recommended cleaning should take place at a minimum of once every week. In areas where pollutants and high greasing levels are prevalent, e.g. beachfront houses or industrial areas, it is recommended a cleaning program should be carried out more frequently.

Care and maintenance schedules are essential to ensure that the life of your asset is maximised whether the project be a residential, commercial or industrial.

Simply follow 4 important steps:

1. Carefully remove any dirt, grease or other contamination with a wet sponge by gently rubbing.
2. Clean by gently rubbing the surface with a soft brush (non-abrasive) and a dilute solution of a mild detergent, e.g. pH-neutral liquid hand or floor detergent in warm water to remove dirt, grease and other deposits. Avoid dwell timer longer than 10 minutes when using disinfectants or concentrates. In general, detergents which do not harm the skin, can be used on SWISS GriP surfaces. For stubborn stains only use high concentrate detergents. Do not use solvents or detergents which are abrasive or which contain acids or alcohol. Do not use abrasive tools.
3. Rinse the surfaces with clean fresh water after cleaning to remove all residues.
4. Dry the surface after cleaning

Swiss GriP Intensive Cleaner and Swiss GriP Bathroom Cleaner are approved cleaners for Swiss GriP Surfaces.



The Do's & Don'ts of protecting your Swiss GriP coating



DO

Regularly clean

Regularly inspect

Clean in mild conditions



DON'T

Don't use solvents, abrasives, alcohol, sodium or chlorine

Don't rub Swiss GriP Coatings excessively

Don't use hard brushes, scrubs or other abrasive tools

High pressure cleaning is possible when keeping a distance of at least 25cm from the surface. Pressure: max. 60 Barr. Only use soft pads on floor cleaning machines. Do not use hard brushes, scrubbing pads and other abrasive pads.

Curing time: 12 hours.

Full chemical curing time: Chemical and mechanical cleaning possible after 4 days.

Swiss GriP warranty shall be void and not apply if the Product has been subjected to misuse or if the cleaning instructions have not been strictly followed.

Advice Line

Our dedicated consultants can help simplify the specification process, saving you time and money by providing the right coating advice for your project. Call: (03) 7020 2041 or visit: www.swissgrip.com.au

SWISSGriP⁺

Offices

Australia

Swiss GriP Australia Pty Ltd

111/244 Dorcas Street

South Melbourne VIC 3205

☎ (61) 3 7020 2041

Switzerland

GriP Safety Coatings AG

Aahusweg 16

6403, Küssnacht am Rigi

☎ (41) 4 1726 2080