


Technical Advise

Care and Maintenance of Swiss GriP Non-Slip

SWISSGriP⁺
NON-SLIP COATINGS

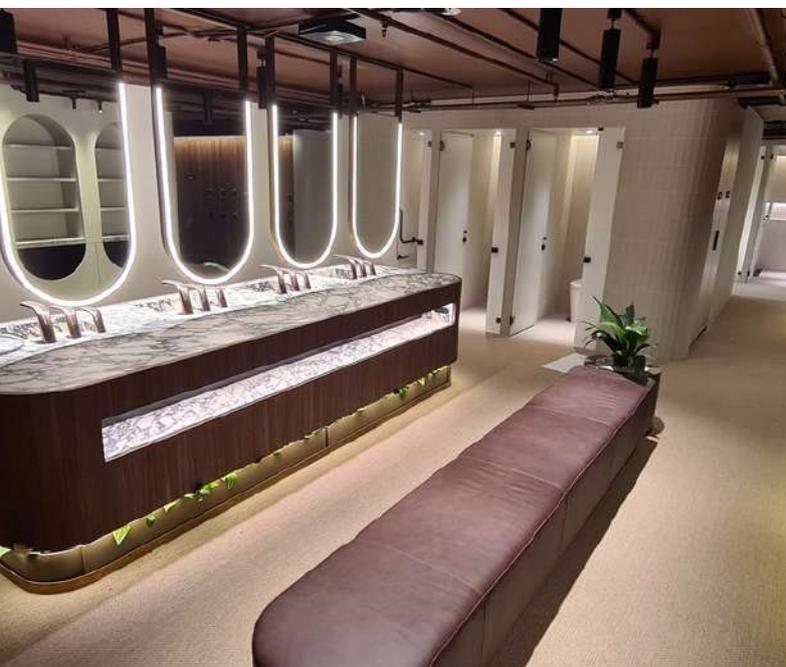

Swiss GriP® coatings are the best choice to create long-lasting non-slip surfaces that comply to the Australian Standard for slip-resistance.

SWISSGriP+
NON-SLIP COATINGS

To ensure the life of your Swiss GriP Coating is maximised and to comply with Swiss GriP warranty requirements, a simple and regular maintenance program should be implemented.

Recommended Care and Maintenance Schedule

After Swiss GriP is applied, you will notice the surface has a water repellent effect. This "lotus effect" refers to self-cleaning properties that are a result of ultrahydrophobicity as exhibited by the leaves of Nelumbo, the lotus flower. So although Swiss GriP makes surfaces slip-resistant, it is easier to clean the surface when using the right cleaning program.

Simply follow 4 important steps:

1. Carefully remove any dirt, grease or other contamination with a soft brush, broom, micro fibre mop in combination with a suitable detergent. Cleaning machines can also be used with non-abrasive cleaning pads.
2. Use mild cleaning solutions e.g. pH-neutral floor detergent. Always dilute concentrated detergents in accordance to the manufacturer's instructions. Dilute the detergent in warm water to remove dirt and grease. Avoid dwell timer longer than 10 minutes when using disinfectants or concentrates. In general, detergents which do not harm the skin, can be used on SWISS GriP surfaces. Do not use solvents (e.g. methylated spirits, acetone, etc.), or detergents which are abrasive or which contain acids or alcohol.
3. Rinse with plenty of clean, cold water after cleaning.
4. Dry the surface after cleaning. Dry the surface with a squeegee, dry microfibre mop or the dry function on the cleaning machine.

Swiss GriP Intensive Cleaner and Swiss GriP Bathroom Cleaner are approved cleaners for Swiss GriP Surfaces.

In areas where pollutants and high greasing levels are prevalent, e.g. commercial kitchens or industrial areas, it is recommended to install a daily cleaning program. Care and maintenance schedules are essential to ensure that the life of your Swiss GriP surface is maximised.

The Do's & Don'ts of protecting your Swiss GriP coating



DO

Regularly clean

Regularly inspect

Clean in mild conditions

Rinse with clear water and dry the surface after finishing



DON'T

Don't use solvents, spirits, alcohol, sodium or chlorine

Don't rub Swiss GriP Coatings excessively

Don't use hard brushes, scrubbing pads, or other abrasive tools

Don't use "dirt-blaster" functions on pressure washers

High pressure cleaning is possible when keeping a distance of at least 25cm from the surface. Pressure: max. 60 Barr. Do not use "dirt-blaster" functions on pressure washers. Only use soft pads on floor cleaning machines. Do not use hard brushes, scrubbing pads and other abrasive pads.

Curing time: 12 hours.

Full chemical curing time: Chemical and mechanical cleaning possible after 4 days.

Swiss GriP warranty shall be void and not apply if the Product has been subjected to misuse or if the cleaning instructions have not been strictly followed.

Advice Line

Our dedicated consultants can help simplify the specification process, saving you time and money by providing the right coating advice for your project.

Call: (03) 7020 2041 or email info@swissgrip.com.au

SWISSGriP⁺

Offices

Australia

Switzerland

Swiss GriP Australia Pty Ltd

448 City Road
South Melbourne VIC 3205
☎ (61) 3 7020 2041

Swiss GriP NSW

Level 2/50 Yeo Street
Neutral Bay, NSW 2089
☎ (61) 2 4504 0275

GriP Safety Coatings AG

Aahusweg 16
6403, Küssnacht am Rigi
☎ (41) 4 1726 2080